



BULLOCK MFG Pty Ltd.


Model 5650

**Masonry Wall with
Metal Expansion Gap Seals**



Installation Instructions - 4 Hour Rating

1. INITIAL DAMPER TEST - Before installing Damper into wall, check damper's closing operation. This can be achieved by removing UL33 rated fusible link. Hold the damper in a stable upright position, then using the link strap or the "cricket bat", push the blade vertically to the top. This will clear the blade over the two locking tabs. Pivot the blade back against the stainless steel spring(s) to the fully open position, then let the blade close and lock. Replace fusible link and close link strap.
2. Advise builder of damper location and direction of airflow.
3. Damper should be laid on a 3mm to 4mm thick mortar bed to ensure airtight seal. NOTE: Dampers are clearly labeled with "AIRFLOW" direction and "TOP" of unit.
4. Complete brickwork around and over damper, filling gap between brickwork and damper with a thin layer of mortar.
5. Repeat INITIAL DAMPER TEST as outlined in point #1.
6. Connect ductwork to fire damper using fire rated mastic to fill recess if using raw edge connection, or apply mastic to both surfaces of the TDF flange connections. (bolts must be of a low melting point material.)

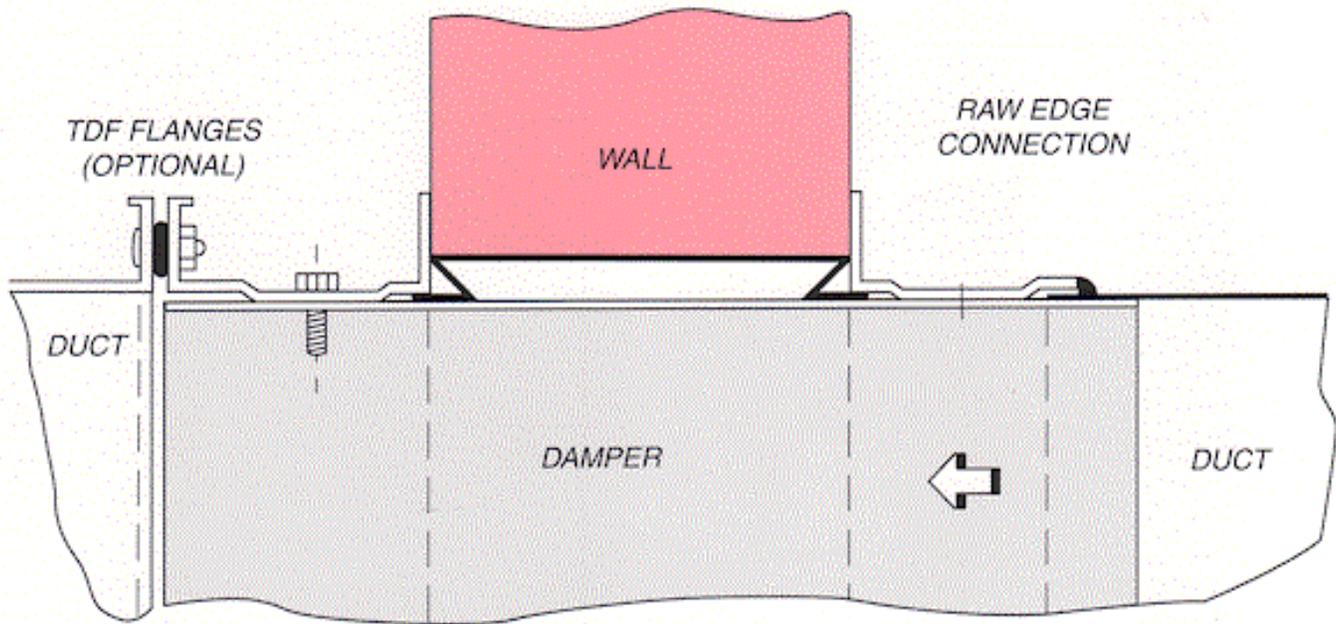

Maintenance Instructions

All fire dampers shall be accessible and maintained in accordance with AS1851.Part6

Specifications are subject to change without notice.

BULLOCK MFG P/L ~ 22 Pike St. Rydalmere. NSW 2116 Ph: (02)9684 1311 Fax: (02)9684 2250
BULLOCK VIC P/L ~ 54 Tarnard Dr. Braeside. VIC 3195 Ph: (03)9587 5522 Fax: (03)9587 6622
BULLOCK WA P/L ~ 34 Industry St. Malaga. WA 6062 Ph: (08)9248 1633 Fax: (08)9248 1733
BULLOCK INDUSTRIES P/L ~ 26 Quindus St, Wacol. QLD 4076 Ph: (07) 3271 2088 Fax: (07)3271 1892
BULLOCK SA P/L ~ U1 Commercial Crt. Dry Creek. SA 5094 Ph: (08) 8349 7088 Fax: (08)8349 7066

email: bullmfg@bigpond.net.au
Copyright © 2004 Bullock Manufacturing Pty Limited. All Rights Reserved.