




# BULLOCK

www.bullockmfg.com.au

## FIRE DAMPER HARDWARE

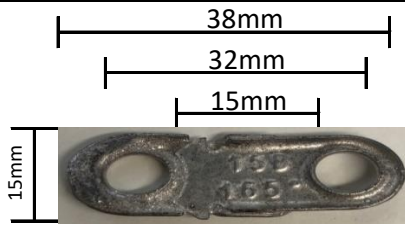


### DROP LOCK FIRE DAMPER FUSIBLE LINK

Ceiling Radiation/Fire Damper Fusible Link

Temp rated - 68 Deg. C (155 Deg. F)

UL33 Tested - Complies AS1530.4

Code #5460

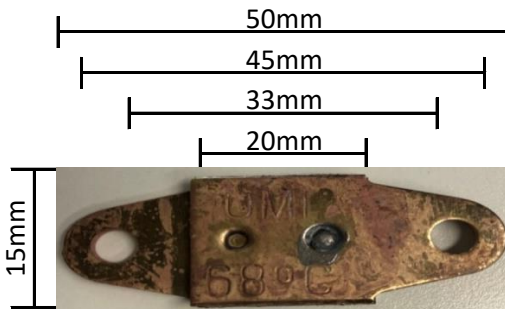

### MULTI BLADE FIRE DAMPER FUSIBLE LINK

Temp rated - 68 Deg. C (155 Deg. F)

Complies AS1530.4

Code #4801




### CURTAIN TYPE FIRE DAMPER SOLDERED FUSIBLE LINK

Temp rated - 68 Deg. C (155 Deg. F)

UL33 Tested - Complies AS1530.4

Code #4903

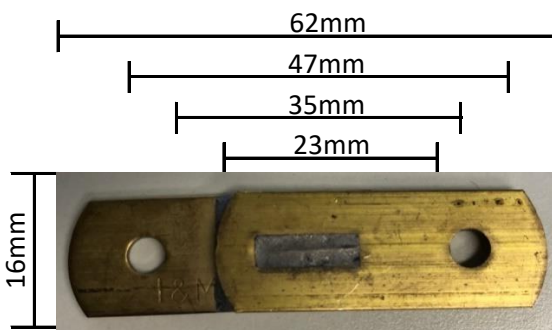

### HIGH TEMPERATURE BRASS FUSIBLE LINK

Temp rated - 104 Deg. C (212 Deg. F)

Code #4802


Your local representatives details can be located at [www.bullockmfg.com.au](http://www.bullockmfg.com.au)



**BULLOCK**  
www.bullockmfg.com.au




## FIRE DAMPER HARDWARE

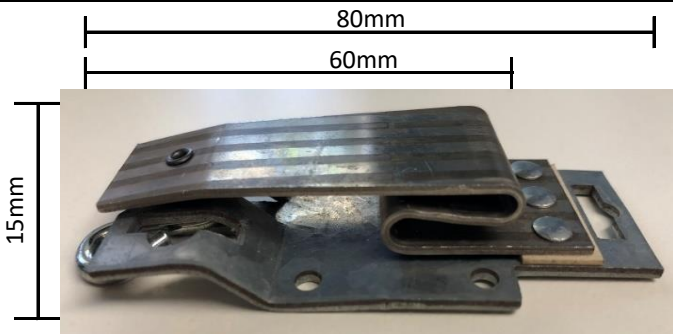

### McCABE REUSEABLE BI-METALLIC THERMAL LINK

Temp rated - 73 Deg. C (165 Deg. F)  
 UL33 Tested - Complies AS1682.1  
 Right Hand Code #5009  
 Left Hand Code #5010



### 8mm Fire Damper Low Melting Point Nylon Bolt

Melting Point Temp below  
200 Deg. C

For use with TDF/TDC Flange  
Channel connections

Code #4908/2



### Fire Damper Insulation Strips

Temp Rated 1160 Deg. C

Strip size: 750 x 225 x 13mm

UL33 Tested - Complies AS1682.2

Code #1257



### 1/4" Fire Damper Cuphead Bolt and 1/4" Wizz Nut

Cup Head Bolt - Code #5630

Wizz Nut - Code #5631



### Kilargo Intumescent Mastic

Colour - Grey 310g Tube

Code #1267

Carton Quantity 20

Your local representatives details can be located at [www.bullockmfg.com.au](http://www.bullockmfg.com.au)

