




BULLOCK


www.bullockmfg.com.au

FIRE DAMPER HARDWARE

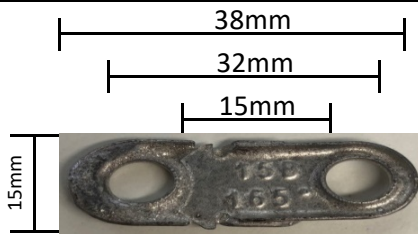


DROP LOCK FIRE DAMPER FUSIBLE LINK

Ceiling Radiation/Fire Damper Fusible Link
Temp rated - 68 Deg. C (155 Deg. F)
UL33 Tested - Complies AS1530.4
Code #5460

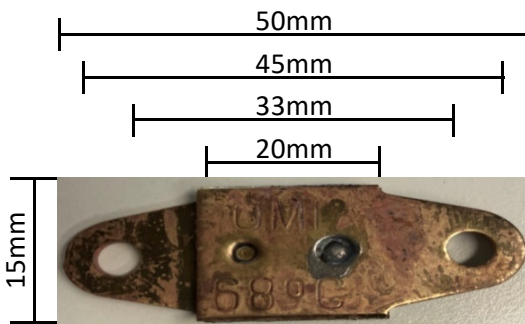


MULTI BLADE FIRE DAMPER FUSIBLE LINK

Temp rated - 68 Deg. C (155 Deg. F)
Complies AS1530.4
Code #4801

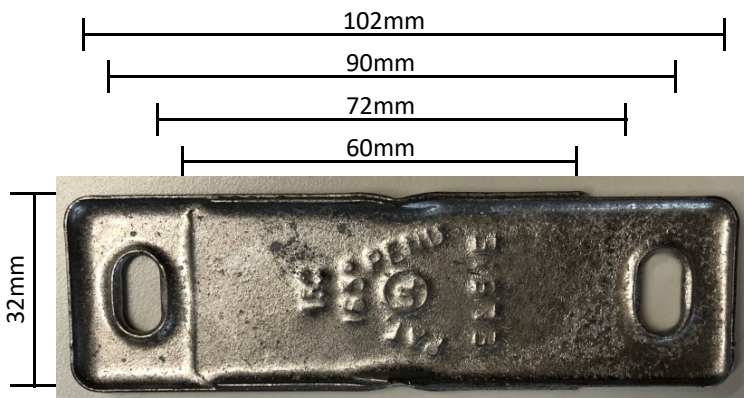

CURTAIN TYPE FIRE DAMPER SOLDERED FUSIBLE LINK

Temp rated - 68 Deg. C (155 Deg. F)
UL33 Tested - Complies AS1530.4
Code #4903

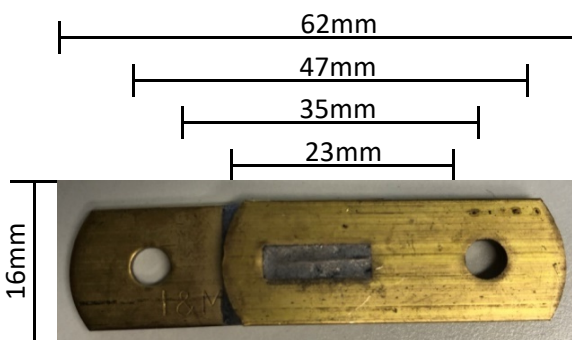

HIGH TEMPERATURE BRASS FUSIBLE LINK

Temp rated - 104 Deg. C (212 Deg. F)
Code #4802

Your local representatives details can be located at www.bullockmfg.com.au



BULLOCK


www.bullockmfg.com.au



BULLOCK

www.bullockmfg.com.au

FIRE DAMPER HARDWARE

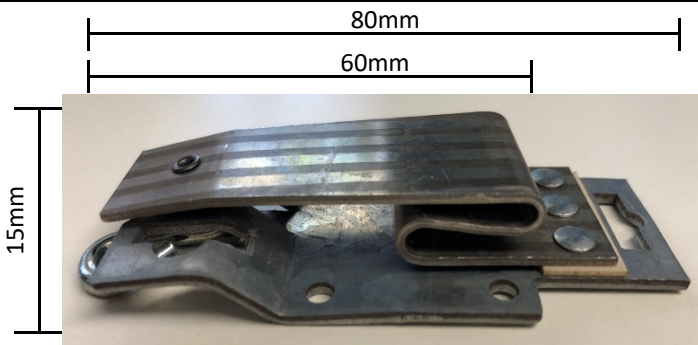


McCABE REUSEABLE BI-METALLIC THERMAL LINK

Temp rated - 73 Deg. C (165 Deg. F)

UL33 Tested - Complies AS1682.1

Right Hand Code #5009

Left Hand Code #5010



8mm Fire Damper Low Melting Point Nylon Bolt

Melting Point Temp below
500 Deg. C

For use with TDF/TDC Flange
Channel connections

Code #4908/2



Fire Damper Insulation Strips

Temp Rated 1160 Deg. C

Strip size: 750 x 225 x 13mm

UL33 Tested - Complies AS1682.2

Code #1257



Fire Damper Flange Cup Head Bolt and Wizz Nut

Cup Head Bolt - Code #5630

Wizz Nut - Code #5631



Kilargo Intumescent Mastic

Colour - Grey 310g Tube

Code #1267

Carton Quantity 20

Your local representatives details can be located at www.bullockmfg.com.au



BULLOCK
www.bullockmfg.com.au