




BULLOCK

www.bullockmfg.com.au

MODEL 5000 ORDERING INSTRUCTIONS

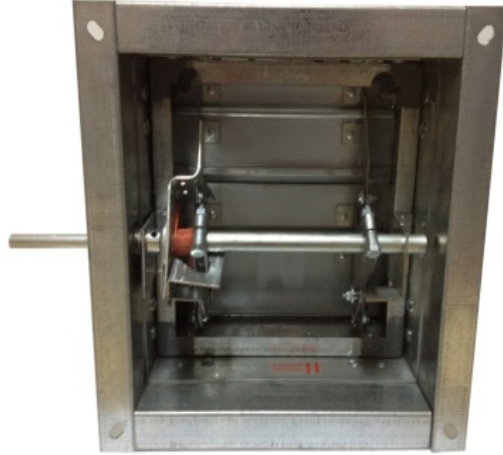

Looking at this view, the damper shown here is LEFT HAND DRIVE.

If the damper is installed in the wall and the controls (drive shaft) are in front of you, you choose what side you want to drive from, left or right.....YOUR LEFT OR RIGHT.

When ordering MFSD we require the following information:

1. Quantity
 2. Damper DUCT WIDTH(blade length) dimension in Millimetres
 3. Damper DUCT HEIGHT in millimetres
 4. Wall thickness in millimetres
 5. Style – Duct to Duct or Duct to Grille
 6. Drive mounting side – Left or Right
 7. Options: TDF/TDC flanges and Metal expansion gap spacers.
- i.e. – 1 x WIDTH x HEIGHT x WALL THICKNESS x STYLE x DRIVE SIDE (LEFT OR RIGHT) x OPTIONS (TDF + SPACERS)

Your local representatives details can be located at www.bullockmfg.com.au



BULLOCK

www.bullockmfg.com.au