



BULLOCK

FIRE DAMPER HARDWARE



Curtain Type Fire Damper Fusible Link
Temp Rated - 73 Deg. C (165 Deg. F)
UL33 Tested - Complies AS1530.4
Product Code # 4903




Multi Blade Type Fire Damper Fusible Link
Temp Rated - 68 Deg. C (155 Deg. F)
Complies AS1530.4
Product Code # 4801



Drop Lock Type Fire Damper Fusible Link
Ceiling Radiation/Fire Damper Fusible Link
Temp Rated - 68 Deg. C (155 Deg. F)
UL33 Tested - Complies AS1530.4
Product Code # 5460




McCabe Reuseable Bi-Metallic Thermal Link
Temp Rated - 73 Deg. C (165 Deg. F)
UL33 Tested - Complies AS1682.1
Product Code # 5720

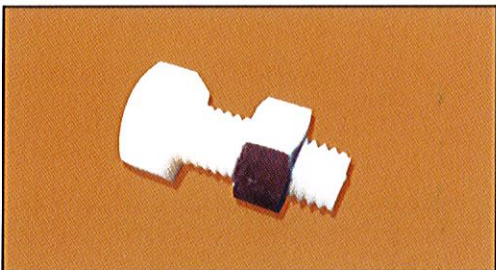

Fire Damper Low Melting Point Nylon Bolt
Melting Point Temp below 500 Deg. C
For Use with TDF/TDC Flange Channel Connections
Product Code # 4908/1



Fire Damper Flange Cup Head Bolt and Wizz Nut
Product Code # 5630 - Cup Head Bolt
Product Code # 5631 - Wizz Nut

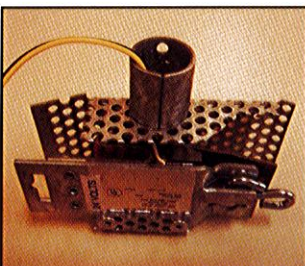

McCabe Electric Reuseable Bi-Metallic Thermal Link
Temp Rated - 73 Deg. C (165 Deg. F)
UL33 Tested - Complies AS1682.1
Product Code # 5721



Fire Damper Insulation Strip
Temp Rated - 1160 Deg. C
Strip Size: 750 x 225 x 13mm
UL33 Tested - Complies AS1682.2
Product Code # 1257



Lorient Intumescent Mastic
Colour - Grey 310g Tube
4 Hour Fire Tested Mastic Sealer
Product Code # 1267
Carton Quantity 20

BULLOCK MFG P/L

22 Pike Street,
RYDALMERE NSW 2116
P:9684 1311 F:9684 2250
sales@bullockmfg.com.au

BULLOCK INDUSTRIES P/L

26 Quindus Street,
WACOL QLD 4076
P:3271 2088 F:3271 1892
reception@bullockqld.com.au

BULLOCK SA P/L

1 Commercial Court,
DRY CREEK SA 5094
P:8349 7088 F:8349 7066
scott@bullocksa.com.au

BULLOCK VIC P/L

54 Tarnard Drive,
BRAESIDE VIC 3195
P:9587 5522 F:9587 6622
admin@bullockvic.net.au

BULLOCK WA P/L

34 Industry Street,
MALAGA WA 6062
P:9248 1633 F:9248 1733
reception@bullockwa.com.au

For Further Information
Please Contact your
Local Representative or
Visit our Website.
www.bullockmfg.com.au