



BULLOCK

THERMAL - FLEXIBLE FAN CONNECTOR

ELEVATED TEMPERATURE APPLICATIONS

PRODUCT DESCRIPTION

BULLOCK **THERMAL flexible fan connector** as described is manufactured to eliminate fan movement or vibration transferring to sheetmetal duct runs or conditioner housings.

Designed and **Tested to AS1530.3** specifically to withstand elevated temperatures in Industrial / Commercial applications.


Manufactured Applications:

- Raw edge connections.
- Flat / RDC slide connections.
- Bolt - on flange connections.
- TDF / TDC Roll-forming connections.
- Fire damper "Break-way" point connection.


Refer to AS1682.2.



Conveniently
Packaged

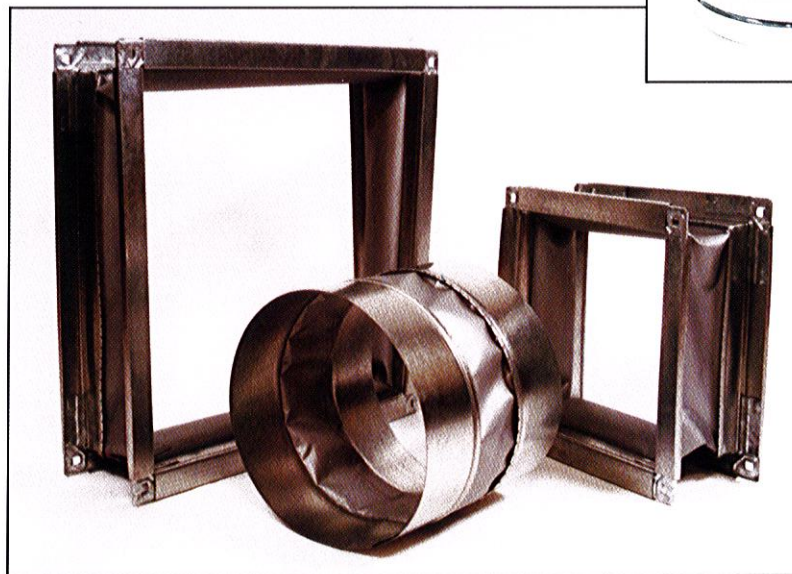

Raw Edge
Round Connection

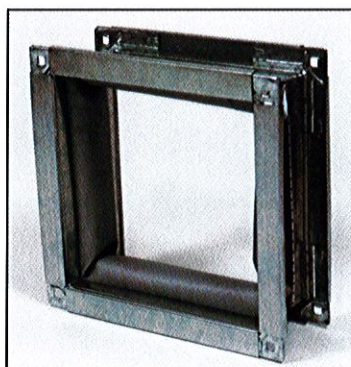

TDF/TDC
Roll-Formed
Connection



BULLOCK MFG P/L

22 Pike Street,

RYDALMERE NSW 2116

P:9684 1311 F:9684 2250

sales@bullockmfg.com.au

BULLOCK INDUSTRIES P/L

26 Quindus Street,

WACOL QLD 4076

P:3271 2088 F:3271 1892

reception@bullockqld.com.au

BULLOCK SA P/L

1 Commercial Court,

DRY CREEK SA 5094

P:8349 7088 F:8349 7066

scott@bullocksa.com.au

BULLOCK VIC P/L

54 Tarnard Drive,

BRAESIDE VIC 3195

P:9587 5522 F:9587 6622

admin@bullockvic.net.au

BULLOCK WA P/L

34 Industry Street,

MALAGA WA 6062

P:9248 1633 F:9248 1733

reception@bullockwa.com.au

For Further Information
Please Contact your
Local Representative or
Visit our Website.

www.bullockmfg.com.au

BULLOCK



THERMAL - FLEXIBLE FAN CONNECTOR

ELEVATED TEMPERATURE APPLICATIONS

FEATURES

- **Metal** edging is of premium grade .6mm Galvanised Steel.
- **Fabric** yarn construction is Type E glass fibre continuous filament. The weave pattern is a 4 shaft satin design. The fabric thickness is a nominal 0.46mm with a weight of 543gsm. The fabric finish is silicone coated giving the fabric excellent features and benefits.
- Roll-formed “**DOUBLE LOOP**” **locking seam** is available in **NOTCHED** or **PLAIN** configuration displaying consistent durable strength and airtight characteristics.
- **Tensile Strength**:(fed 191/5102)WARP - 200kg/50mm.WEFT - 150kg/50mm.
- **Tongue Tear**:(fed 191/5136)WARP - 45kg/50mm.WEFT - 30kg/50mm.
- **Coating Adhesion**: (AS1441.5) - 90N / 50mm strip.
- **Burst Strength**: 550 p.s.i. (3800 kPa)
- **U.V. Treated**: Yes. Ozone resistant.
- **Chemical Resistance**: Resists mosts acids, alkalis, oils.
- **Anti-fungicide resistant**: Yes.
- **Waterproof**: Yes.
- **Airtight**: Yes.
- **Joining Adhesive**: High temperature neutral cure silicone equivalent to Rhodorsil RTV-922. For high velocity applications a standard washer / rivet / washer reinforcement may be required.
- **Colour**: Silver.
- **Roll length**: 20 metres. **Fabric Width**: Standard - 100mm.
- **Roll Weights**: TF-50 = 14 kgs. TF-75 = 18 kgs.TF-100 = 23 kgs.
- **Roll Widths**: TF-50 = 50mm metal.Total Span = 185mm.
TF-75 = 75mm metal. Total Span = 230mm.
TF-100 = 100mm metal. Total Span = 275mm.
- **AWTA test** number to AS 1530.3 7-441673-BN. Dated- 25/08/92.
- **Results**: Ignitability Index-0. Range 0-20. Spread of Flame Index-0. Range 0-10. Heat Evolved Index-0. Range 0-10. Smoke Developed Index-1. Range 0-10.
- **Continuous operating temperatures**:Base fabric - 550 Degree Celsius. Surface coating - 230 Degree Celsius.

BULLOCK MFG P/L

22 Pike Street,
RYDALMERE NSW 2116
P:9684 1311 F:9684 2250
sales@bullockmfg.com.au

BULLOCK INDUSTRIES P/L

26 Quindus Street,
WACOL QLD 4076
P:3271 2088 F:3271 1892
reception@bullockqld.com.au

BULLOCK SA P/L

1 Commercial Court,
DRY CREEK SA 5094
P:8349 7088 F:8349 7066
scott@bullocksa.com.au

BULLOCK VIC P/L

54 Tarnard Drive,
BRAESIDE VIC 3195
P:9587 5522 F:9587 6622
admin@bullockvic.net.au

BULLOCK WA P/L

34 Industry Street,
MALAGA WA 6062
P:9248 1633 F:9248 1733
reception@bullockwa.com.au

For Further Information
Please Contact your
Local Representative or
Visit our Website.

www.bullockmfg.com.au

For further information please contact your local representative. Specifications subject to change without notice

Australian Owned - Australian Made