




# BULLOCK

[www.bullockmfg.com.au](http://www.bullockmfg.com.au)


## STRAPACK® EZ CORNERMATIC & EZ BOLT

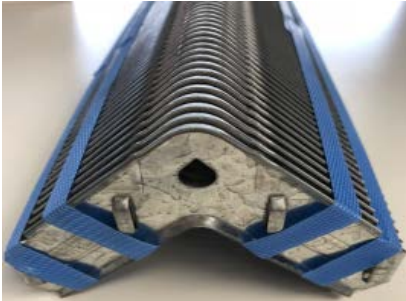

**EZ Cornermatic TDF Strapack®**  
Code #1240/EZctnTDFcornermatic  
80 per Strapack®



**EZ Cornermatic TDC Strapack®**  
Code #1240/EZctnTDFcornermatic  
80 per Strapack®

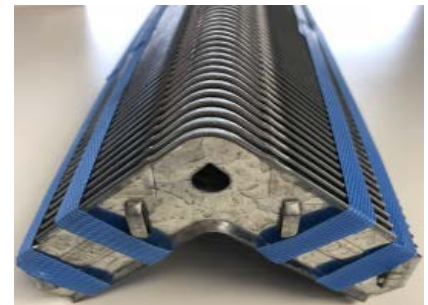

**EZ Bolt**  
**1.5 Bolt**  
Code #1240/EZ1.5Bolt  
**0.75 Bolt**  
Code #1240/EZ3/4Bolt

Manufactured from 1.5 Galvanised Steel. The EZ Corner is available for both TDF & TDC Duct and come packed in the popular Strapack® format. The patented "Tear Drop" hole in conjunction with the EZ Bolt is the next revolution in duct installation.

The EZ Bolt recessed head holds better in the magnetic socket. It is better angled to more easily be removed from the magnetic sock if you need to. The spin out zone holds the Bolt straight and level in place no matter where you stop in the drive rotation when putting into the first corner flange so it pilots the next duct into position. The threads are specially designed to hold well in the teardrop of the second corner flange and to drive without cross-threading. The tip and the threads are rounded to avoid snagging.

For four bolt connectors, SMACNA chose  $\frac{3}{4}$ " thread length to be the best compromise of sufficient length for support and not to much to stick out where it can snag clothing, gloves or hands.

The  $1\frac{1}{2}$ " thread length was chosen to maximize the ability to draw in the final connector corner or two when the fitting or duct is twisted or out of square AND long enough to be seen and avoided.

Your local representatives details can be located at [www.bullockmfg.com.au](http://www.bullockmfg.com.au)



**BULLOCK**  
[www.bullockmfg.com.au](http://www.bullockmfg.com.au)